


## 751X2004

**Termination Load 50 ohm**  
**Low PIM: -160dBc 200W**  
**DC-4000 4.3-10: -Male / Female**

### Termination Load 50ohm DC-4000 200W

Type	75112004 (4.3-10-Female)	75122004 (4.3-10-Male)
Power Rating (W)	200	
Frequency (MHz)	DC - 4000	
PIM3 (dBc)	-160	
Impedance ( $\Omega$ )	50	
VSWR	$\leq 1.20$	
Dimension (mm)**	180 x 150 x 62	
Weight (kgs)*	Female: 2.595 approx.	
	Male: 2.580 approx.	
Ingress Protection	IP65	
Operating temperature ( $^{\circ}\text{C}$ )	-40 to +80	

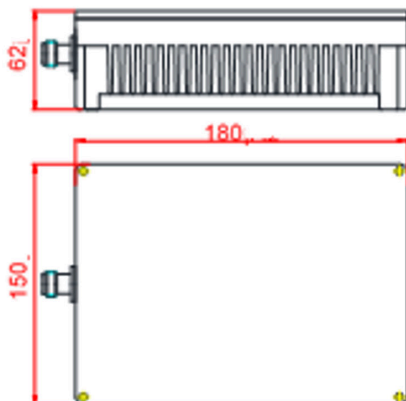

\* including mounting bracket and connectors  
 \*\* excluding mounting bracket and connectors